

HARDWARE / SPECIFICATIONS / FEATURES / ACCESSORIES

Compact Standard Console



Column / Wall Console



Power Requirements	115/230V, 15 amp*, 50/60 Hz, 1 ph †
Processor	Intel® Core™ i3 - 3.1 Ghz (or greater)
Memory	4 GB of DDR3 SDRAM
Hard Drive	120.0 GB SSD (or greater)
DVD-RW/CD-RW Drive	Yes - Standard
Monitor Class	24" Widescreen LCD
Wireless Network Module	Optional
Operating System	Windows® 7
Supports DSP506T/DSP306T Sensors	Yes - Standard
Supports TD Targets	Optional - Requires Premium Key Kit 20-2005-1
Supports HD Targets	Yes - Standard
Color Ink Jet Printer	Yes - Standard
Award-Winning WinAlign® Software	Yes - Standard
Vehicle Specifications (30 plus years)	Yes - Standard - 2 Years Free Updates
CodeLink® Steering System Reset **	Optional (Light Duty Mode Only)
Complete TPMS Reset Database	Yes - Standard (Light Duty Mode Only)
Live Ride Height Adjustment	Optional
Fully Integrated Alignment	Yes (FIA Equipped Rack Required)
Modified Vehicle Alignment	Optional
Vehicle Inspection with Photos	Optional (Light Duty Mode Only)
Tools and Kits - Basic Catalog	Yes - Standard (Light Duty Mode Only)
Tools and Kits - Video and Photos	Optional (Light Duty Mode Only)
Equipment Video Help / Assistance	Optional
HunterNet featuring WebSpecs®	Yes - 2 Years Free Standard
Training and Productivity Aids	1,600+ Illustrations, 100+ Animations
Supports TouchRemote	Optional
Steering Wheel Holder	Yes - Standard
Brake Pedal Depressor	Yes - Standard
Wireless Remote	Yes - Standard
Power Line Filter	Yes - Standard
Drive-on Camera Compatible	Yes - Standard
Support for HD Rolling Compensation	Optional - 20-2005-1
Support for DSP 760T (6 sensor set)	Optional - 20-2005-1
Truck Pusher	Optional (Sold Separately)

* Amperage shown is minimal circuit rating. ** Wireless CodeLink Included (Refer to Form 1708T for coverage information)
*** VIN Spec Recall for HD Vehicles is not possible due to HD VIN limitations. Quick Check Mode is not currently supported in WinAlign HD but will be supported in a future release. † Isolated Ground Recommended

For HD aligner information visit:
www.hunter.com/hd

For local contact visit:
www.hunter.com/company/findrep.cfm

For general inquiries visit:
www.hunter.com or call 800-448-6848

Continued on Reverse



Because of continuing technological advancements, specifications, models and options are subject to change without notice.

SENSOR COMPATIBILITY


	DSP506T	DSP306T	HE421	HS421	HS401	DSP600	DSP400	DSP700	DSP500	DSP300
WinAlign® Version Required	✓ V14.1	✓ V14.1	✓ V14.1	✓ V14.1	✓ V14.1	✓ V14.1	✓ V14.1	✓ V14.1	✓ V14.1	✓ V14.1
Additional Plus Key Required	None	None	Kit 20-2005-1 (448-1016 V2)	None	None	None	None	None	None	None
	Heavy Duty Sensors		Light Duty Sensors							

CONSOLE CONFIGURATIONS


	WT332	WT322
Compact Standard	✓	
Column/Wall-mount		✓
LCD	24 in. Widescreen	24 in. Widescreen
Width (W)	23 in. 584 mm	30.5 in. 775 mm
Height (H)	67 in. 1702 mm	42 in. 1067 mm
Depth (D)	23 in. 584 mm	23.5 in. 597 mm
Shipping Weight	285 lbs. 129 kg	291 lbs. 132 kg

Space consideration for storage of accessories and targets: For compact consoles, add 29 inches to width for TD targets and add 10 inches to depth for rear accessory storage. For DSP506T sensors, add 32 inches to width and 9 inches to depth. For column mounted consoles, optional rear storage will require at least 16 inches behind console.

Compact Standard Console

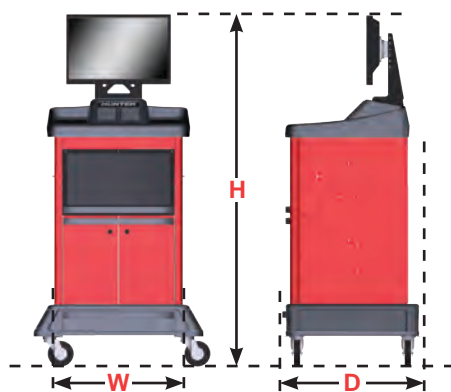

Column / Wall Console

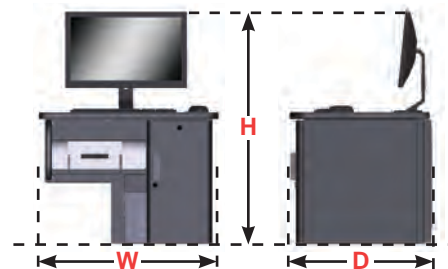

For HD aligner information visit:
www.hunter.com/hd

For local contact visit:
www.hunter.com/company/findrep.cfm

For general inquiries visit:
www.hunter.com or call 800-448-6848

Because of continuing technological advancements, specifications, models and options are subject to change without notice.